
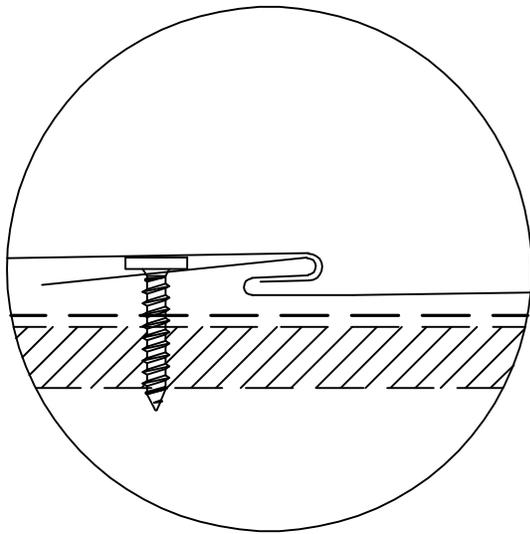


Milan Panel

Product Data

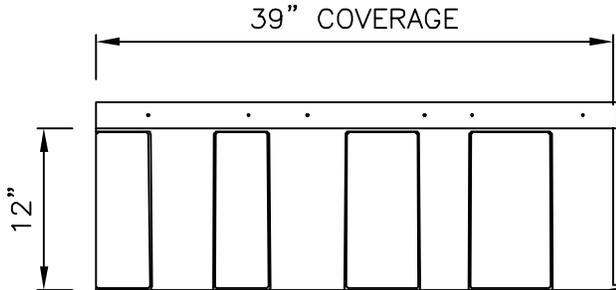

Applications

Concealed fastener metal shingle used on slopes down to 3:12.

Substrates

Plywood

Material

Standard - 29 GA.

Finishes

Galvanized G90 Steel Substrate

Painted and Designer Prints

Fluoropolymer (Kynar 500® PDVF resin-based)

Pan Condition

Oil canning is inherent in all metal panels and is not cause for rejection.

Testing*

Uplift: UL 1897 Wind Uplift

Water Infiltration: UL 489 Wind Driven Rain

Fire Resistance: UL 790 Class A or Class B (based on the exact roof preparation)


Texas Department of Insurance: RC-463

Florida Building Code: FBC#: 19173.1

Testing and Approvals are product specific. Please inquire for details.

NOTE:

All data represented on this sheet may not be applicable to all widths and gauges. Please contact McElroy Metal for more information.



NAIL CLIP

24 GA. Galvanized G90 - ASTM A653 (50 ksi)

